

Cool discharged hot water

Drane-kooler is a water tempering device that mixes cold water with hot water discharged from various types of equipment, such as a humidifier, to reduce the discharged water temperature before it enters a municipal sewer system.

There are two reasons to use a water tempering device. First, most municipalities prohibit draining water hotter than 140 °F (60 °C) into their sewer systems. And second, PVC drain pipes are susceptible to damage from water that is too hot. When faced with either of these situations, Drane-kooler is the solution!

How it works: hot + cold = tempered!

1. Hot water discharged from a humidifier or other appliance enters the Drane-kooler through piping connected to the top threaded connection. A vacuum breaker prevents backflow into potable water systems.
2. Cold water enters through the temperature-actuated valve. The valve and the Drane-kooler's straightforward design ensure efficient mixing of hot and cold water. The valve's sensor, located near the outlet, ensures that water leaving the Drane-kooler is 140 °F (60 °C) or less before entering the municipal sewer system.
3. Tempered water at 140 °F (60 °C) or less exits through the side outlet for safe discharge into a municipal sewer system or PVC pipe.

Reliable, non-electric valve

The temperature-actuated valve is time-tested to be reliable and maintenance-free. And because it is non-electric, no wiring is required!

Multiple mounting options

The Drane-kooler can be mounted by attaching the integral mounting plate to a wall, by attaching the mounting plate to an adjustable floor stand, or by using an assembly for suspension mounting. These multiple mounting options provide capability for the Drane-kooler to be properly supported and not secured entirely by piping.




The Drane-kooler tempers hot water discharged from evaporative humidifiers or other appliances, cooling water before it enters municipal sewer systems or PVC pipe.

A space-efficient horizontal orientation and side drain outlet provide enough clearance to allow the Drane-kooler to be mounted directly underneath DRI-STEEM humidifiers, saving footprint space while allowing room for pitched drain piping.

Capacity and dimensions

**Figure 2-1:
Drane-kooler dimensions**

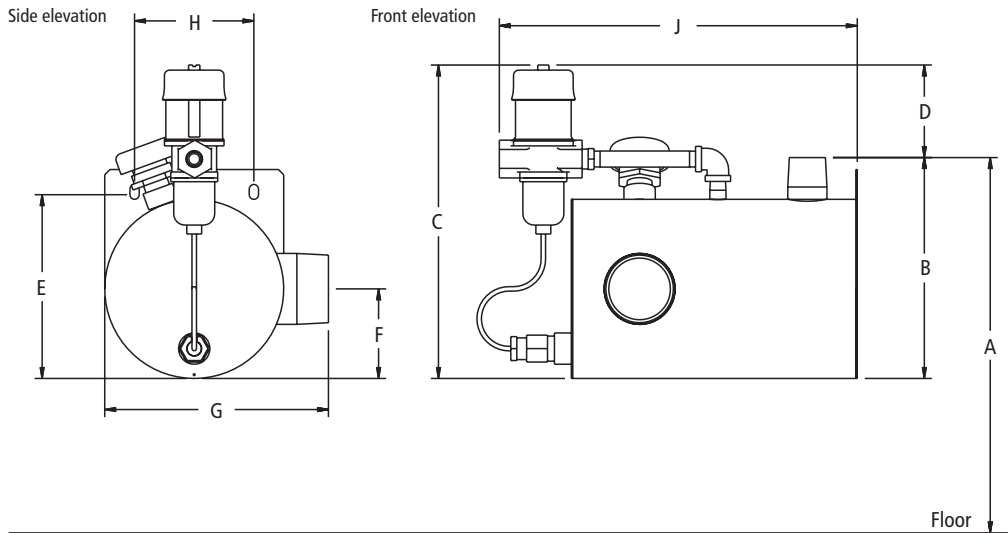

OM-1113

**Table 2-1:
Drane-kooler connections**

Hot water inlet connection	1" (DN25) pipe thread
Tempered water outlet connection	2" (DN50) pipe thread
Cold water supply connection	3/8" (DN105) pipe thread

**Table 2-2:
Drane-kooler capacities***

	Maximum flow rate		Maximum temperature	
	U.S. gpm	L/m	°F	°C
Hot water inflow	6	22.7	212	100
Cold water inflow**	6	22.7	70	21
Tempered water outflow	12	45.4	140	60

Note:

* This table applies only if one humidifier is connected to one Drane-kooler, with no more than 10' (3m) of vertical dimension between the Drane-kooler and the humidifier.

** Cold water inflow pressure must be between 25 psi and 80 psi (172 kPa and 552 kPa).


**Table 2-3:
Drane-kooler dimensions**

	Description	inches	mm
A	Height with floor stand (from floor to top of hot water inlet in 1" [25 mm] increments)	8.25 to 12.25	210 to 312
	Height with floor stand and extension (from floor to top of hot water inlet in 1" [25 mm] increments)	13.25 to 20.25	337 to 515
B	Height from bottom of tank to top of hot water inlet	7.5	191
C	Height from bottom of tank to top of valve	10.5	268
D	Height from top of hot water inlet to top of valve	3.0	76
E	Height from bottom of tank to center of mounting hole	6.25	159
F	Height from bottom of tank to center of tempered water outlet	3.0	76
G	Width of tank and tempered water outlet	7.5	191
H	Width of mounting plate holes, center to center	4.0	102
J	Length, from valve inlet to mounting plate	12.0	305

Fits under DRI-STEEM humidifiers

**Figure 3-1:
Mounting options**


The Drane-kooler has an integral mounting plate for wall mounting. An optional adjustable floor stand may be ordered for floor mounting, and an optional assembly may be ordered for suspension mounting. See the dimensions table on Page 2 for the adjustable floor stand heights.

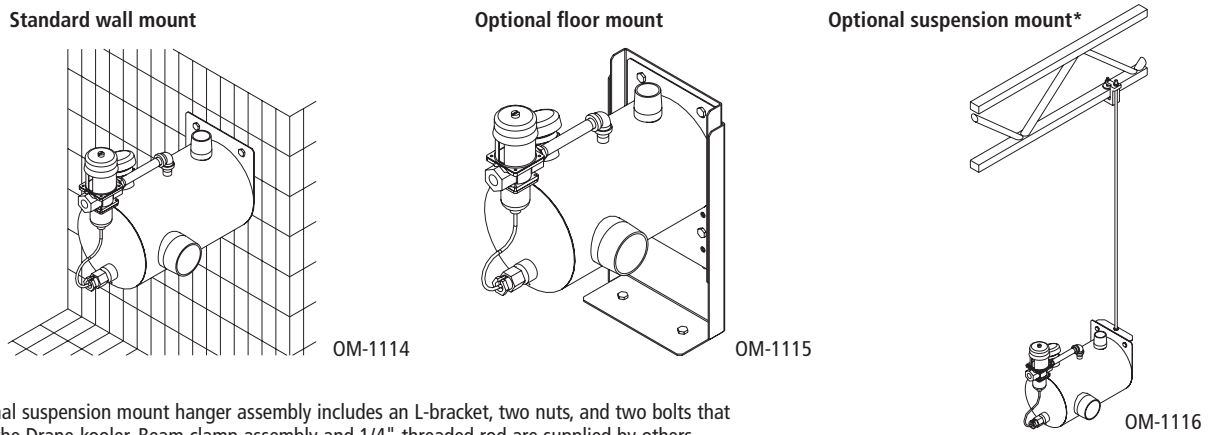

Note:

* The optional suspension mount hanger assembly includes an L-bracket, two nuts, and two bolts that attach to the Drane-kooler. Beam clamp assembly and 1/4" threaded rod are supplied by others.

**Figure 3-2:
Optional floor mount piping example**

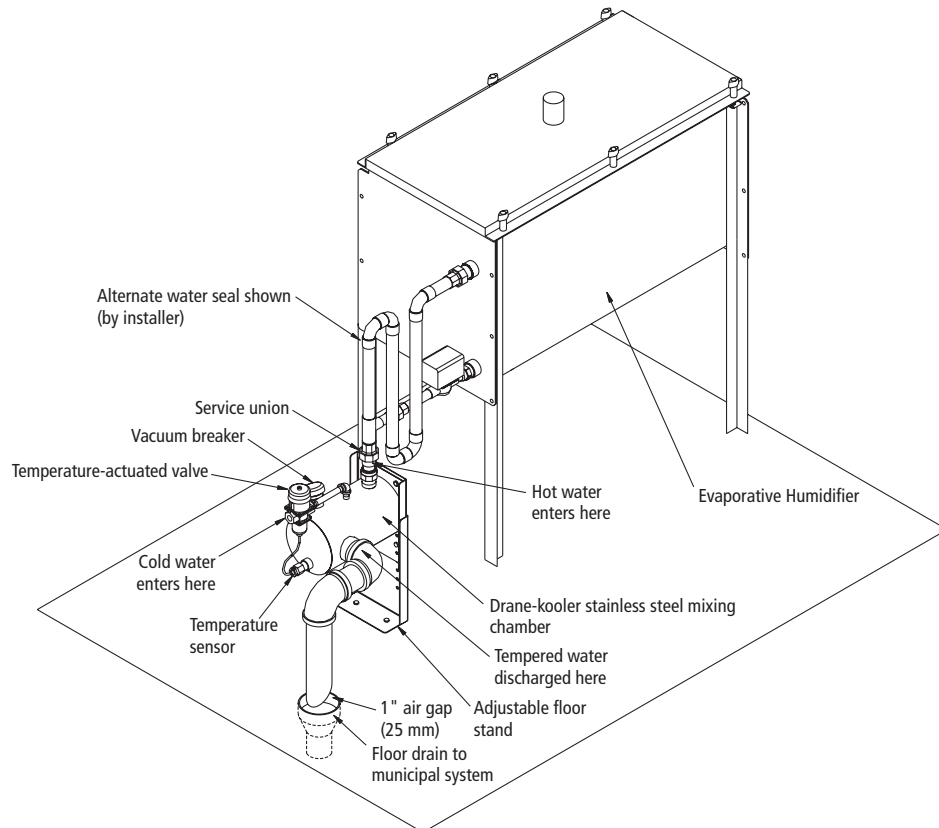

OM-1117

Expert help makes it easy

Expect quality from the industry leader

For more than 40 years, DRI-STEEM has been leading the industry with creative and reliable humidification solutions. Our focus on quality is evident in the construction of our products, which feature an industry-leading Two-year Limited Warranty.

For more information

www.dristeem.com
sales@dristeem.com

For the most recent production information, visit our web site, www.dristeem.com

DRI-STEEM Corporation

An ISO 9001:2000 certified corporation.

U.S. Headquarters:
14949 Technology Drive
Eden Prairie, MN 55344
800-328-4447 or 952-949-2415
952-229-3200 (fax)

European office:
Marc Briers
Grote Hellekensstraat 54 b
B-3520 Zonhoven
Belgium
+3211823595 (voice)
+3211817948 (fax)
E-mail: marc.briers@dristeem.com

Continuous product improvement is a policy of DRI-STEEM Corporation; therefore, product features and specifications are subject to change without notice.

DRI-STEEM and Dri-calc are registered trademarks of DRI-STEEM Corporation and are filed for trademark registration in Canada and the European community.

Drane-kooler is a trademark of DRI-STEEM corporation.

Let Dri-calc do the calculating!

DRI-STEEM's exclusive software, Dri-calc, is a user-friendly software program designed to save engineering time. The software sizes loads, selects equipment, writes specifications, generates as-configured installation guides, and creates equipment schedules for DRI-STEEM products. It also includes a library of technical documents.




Request a free copy of Dri-calc at our web site, www.dristeem.com

All Products Brochure

DRI-STEEM's *All Products Brochure* features the complete line of humidification products and accessories.

Download the [All Products Brochure](#) at www.dristeem.com.



Your DRI-STEEM distributor is: